

Technical Specification


PH3-A1 Phosphine Sensor

Apollo



Figure 1 PH3-A1 Schematic Diagram

PATENTED

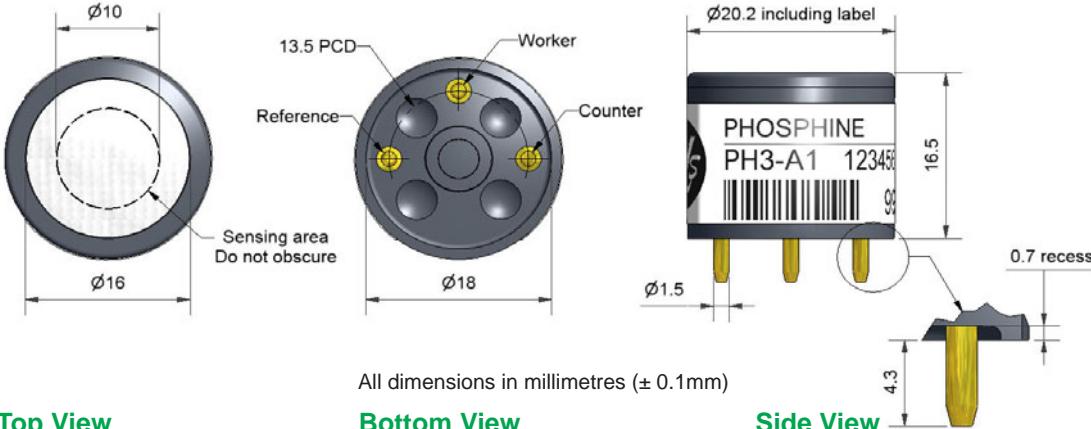

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 11ppm PH ₃ t ₉₀ (s) from zero to 5ppm PH ₃ ppm equivalent in zero air RMS noise (ppm equivalent) ppm PH ₃ limit of performance warranty ppm error at full scale, linear at zero, 20ppm PH ₃ maximum ppm for stable response to gas pulse	1000 to 1500 <25 <0.15 <0.03 10 <-0.6 50
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)	<±0.05 <10 >24
ENVIRONMENTAL	Sensitivity @ -20°C Sensitivity @ 50°C Zero @ -20°C Zero @ 50°C	% (output @ -20°C/output @ 20°C) @ 11ppm PH ₃ % (output @ 50°C/output @ 20°C) @ 5ppm PH ₃ ppm equivalent change from 20°C ppm equivalent change from 20°C	45 to 60 130 to 145 ±0.15 ±0.07
CROSS SENSITIVITY	H ₂ S sensitivity NO ₂ sensitivity Cl ₂ sensitivity NO sensitivity SO ₂ sensitivity CO sensitivity H ₂ sensitivity C ₂ H ₄ sensitivity NH ₃ sensitivity CO ₂ sensitivity	% measured gas @ 20ppm H ₂ S % measured gas @ 10ppm NO ₂ % measured gas @ 10ppm Cl ₂ % measured gas @ 50ppm NO % measured gas @ 20ppm SO ₂ % measured gas @ 400ppm CO % measured gas @ 400ppm H ₂ % measured gas @ 80ppm C ₂ H ₄ % measured gas @ 25ppm NH ₃ % measured gas @ 5% vol CO ₂	<250 <-80 <-25 <-2 <50 <0.7 <0.2 <15 <0.2 <0.1
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period Load resistor Bias voltage Weight	°C kPa % rh continuous months @ 0 to 20°C (stored in original container) Ω mV g	-30 to 50 80 to 120 20 to 90 6 10 to 33 not required < 6



NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

深圳市新世联科技有限公司

Technical Specification

PH3-A1 Performance Data



Figure 2 Sensitivity Temperature Dependence

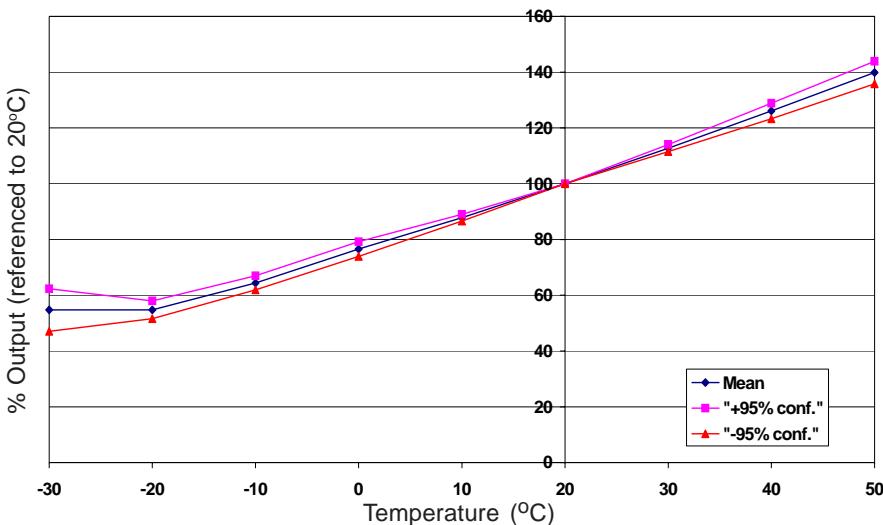


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and $\pm 95\%$ confidence intervals are shown.

Figure 3 Zero Temperature Dependence

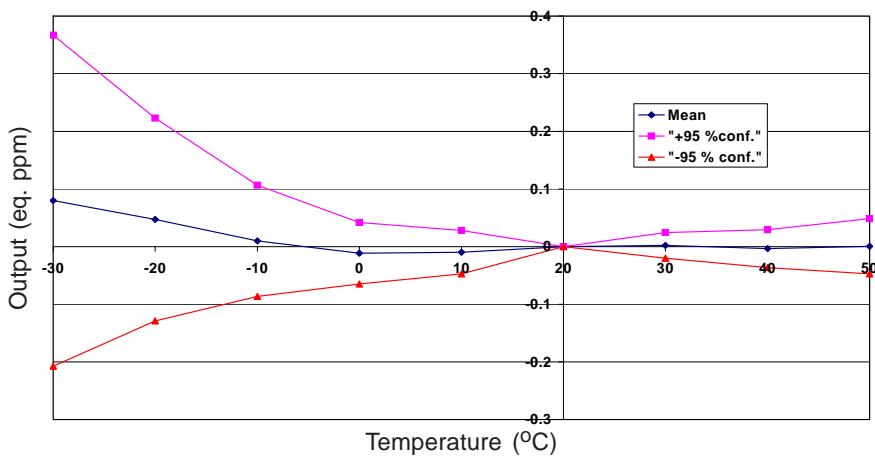


Figure 3 shows the variation in zero output caused by changes in temperature expressed as ppm gas equivalent.

This data is taken from a typical batch of sensors. The mean and $\pm 95\%$ confidence intervals are shown.

Figure 4 Linearity

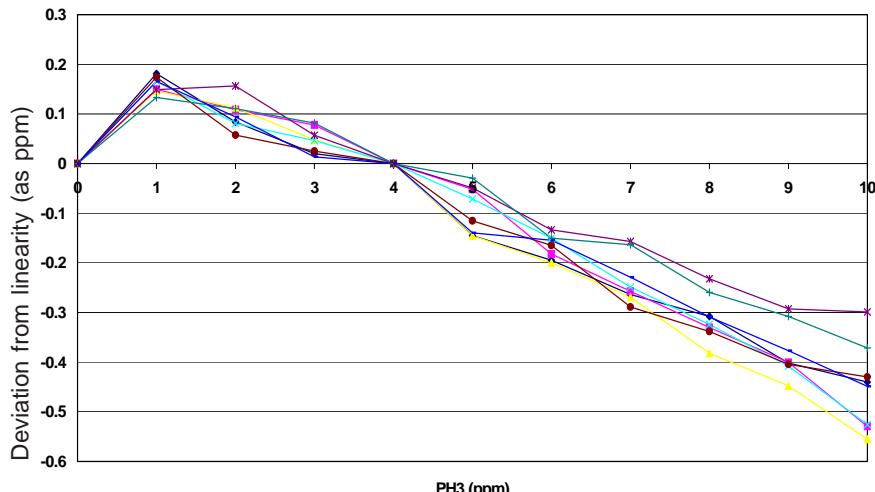


Figure 4 shows variation from linearity to 10ppm. Software correction between 0 and 0.5ppm can improve overall linearity.

Repeatable performance means linearity correction can be added to software.

深圳市新世联科技有限公司